



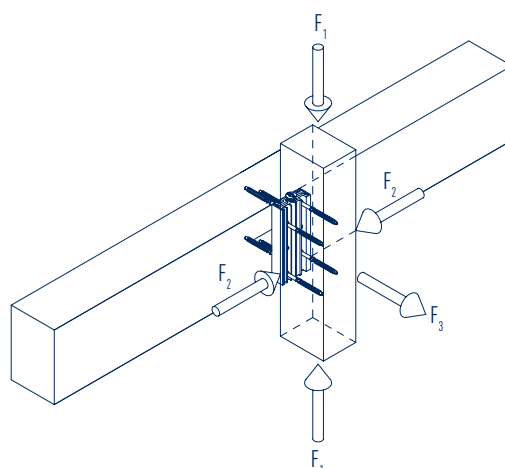


LamellenFix


TECHNICAL DATA SHEET

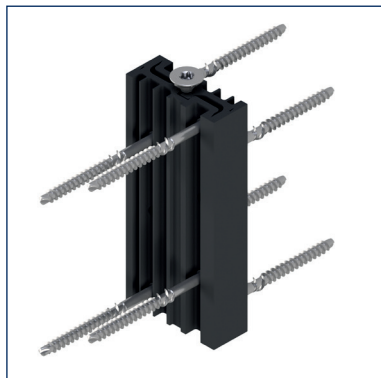

Screwing of the wooden slat:
TeFix® in hardened stainless steel

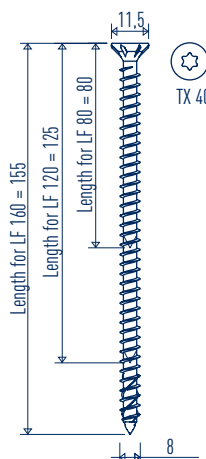


Locking screw:
GoFix® S+ in stainless steel

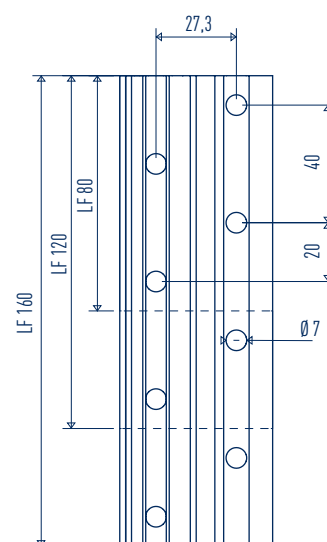

SIHGA®		Dimension		Slat		Substrate	
montagepack		LamellenFix	TeFix® in slat per connector	min. Width	min. Height (depth)	min. Height	min. Width (depth)
Art. No.	PU	Typ	6,0 x 80	[mm]	[mm]	[mm]	[mm]
31206	60*	80	4	60	80	80	80
31216	60*	120	4	60	80	120	80
31226	60*	160	6	60	80	160	80

* Corresponds to 30 connections

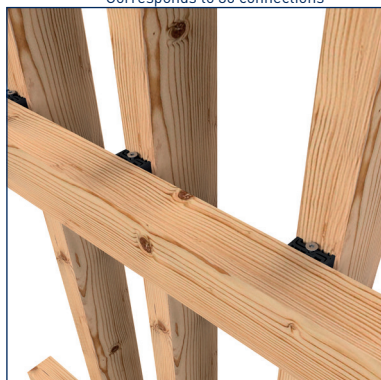

DETAILS

- The secure connector for **architecturally and statically demanding lamella** facades for facade lamellas on different substructures.
- best suited from a lamella dimension of >60 x >80 mm
- few fixing points for large wooden lamellas
- simple, fast installation
- fast drainage of water
- statically loadable in five directions



TAKE THE BEST



**KLIMANEUTRALES
UNTERNEHMEN**
certified by Fokus Zukunft



Leitbetrieb Leitbetrieb
Österreich Deutschland