





Systemvertrieb Innovativer Holzbauprodukte
Gmunden Austria

SIHGA® GmbH | Gewerbepark Kleinreith 4
A-4694 Ohlsdorf bei Gmunden

Telefon: +43 7612-74370-0
Fax: +43 7612-74370-10
E-Mail: info@sihga.com
Web: www.sihga.com

GoFix® SS

Technical Product Information

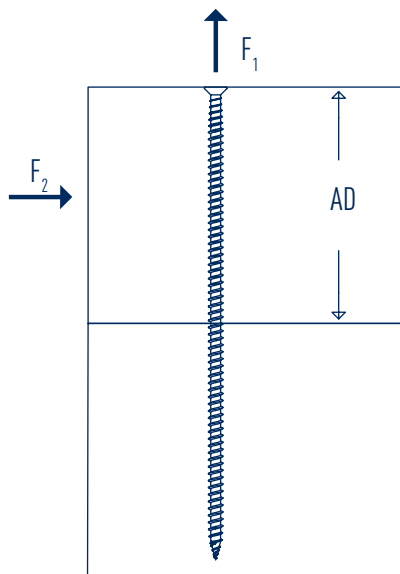

Dimensions [mm]

GoFix® SS

d ₁	TX	DK
11,3	50	18

SIHGA® montagepack		Dimension GoFix® SS	Installation part Wood	Characteristic values	
Art. No.	PU	d ₁ x L	AD [mm]	Tension load F ₁ [kN]	Shear load F ₂ [kN]
25336	50	11,3 x 300	150	16,29	8,78
25346	50	11,3 x 340	170	18,46	9,32
25206	50	11,3 x 380	190	20,64	9,87
25216	50	11,3 x 420	210	22,81	10,41
25226	50	11,3 x 460	230	24,98	10,95
25236	50	11,3 x 500	250	27,15	11,50
25246	50	11,3 x 540	270	29,33	12,04
25256	50	11,3 x 580	290	31,50	12,58
25266	50	11,3 x 620	310	33,67	13,12
25276	50	11,3 x 660	330	35,84	13,67
25286	50	11,3 x 700	350	38,02	14,21
25296	50	11,3 x 750	375	40,73	14,89
25306	50	11,3 x 800	400	43,45	15,57
25316	50	11,3 x 900	450	48,88	16,93
25326	50	11,3 x 1000	500	50,00	18,28

Characteristic values for dimensioning according to EC 5 | Characteristic values for strength class pk 380 kg/m³

TAKE THE BEST






Systemvertrieb Innovativer Holzbauprodukte
Gmunden Austria

SIHGA® GmbH | Gewerbepark Kleinreith 4
A-4694 Ohlsdorf bei Gmunden

Telefon: +43 7612-74370-0
Fax: +43 7612-74370-10
E-Mail: info@sihga.com
Web: www.sihga.com

GoFix® SS

Technical Product Information

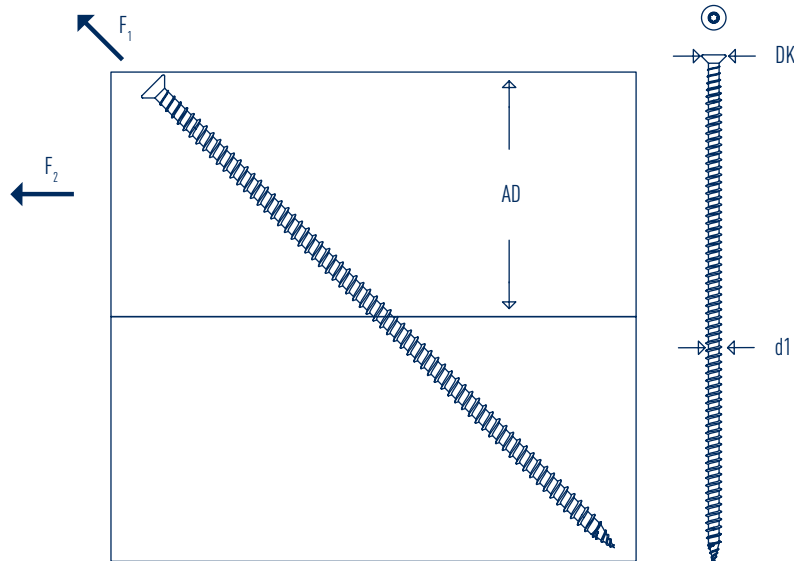

Dimensions [mm]

GoFix® SS

d ₁	TX	DK
11,3	50	18

SIHGA® montagepack		Dimension GoFix® SS	Installation part Wood	Characteristic values	
Art. No.	PU	d ₁ x L	AD [mm]	Tension load F ₁ [kN]	Shear load F ₂ [kN]
25336	50	11,3 x 300	110	14,81	10,47
25346	50	11,3 x 340	120	16,79	11,87
25206	50	11,3 x 380	140	18,76	13,27
25216	50	11,3 x 420	150	20,74	14,66
25226	50	11,3 x 460	170	22,71	16,06
25236	50	11,3 x 500	180	24,69	17,46
25246	50	11,3 x 540	200	26,66	18,85
25256	50	11,3 x 580	210	28,64	20,25
25266	50	11,3 x 620	220	30,61	21,64
25276	50	11,3 x 660	240	32,58	23,04
25286	50	11,3 x 700	250	34,56	24,44
25296	50	11,3 x 750	270	37,03	26,18
25306	50	11,3 x 800	290	39,50	27,93
25316	50	11,3 x 900	320	44,43	31,42
25326	50	11,3 x 1000	360	49,37	34,91

Characteristic values for dimensioning according to EC 5 | Characteristic values for strength class pk 380 kg/m³

TAKE THE BEST

